

OPERATING INSTRUCTIONS

The Monarch® 9496™ Battery Charger/AC Adapter charges the 14.8V lithium-Ion battery in your Monarch 9493™ printer and provides AC power to the printer.

You **must** charge a battery before using it for the first time.

WARNINGS

- ◆ Use only the 9496 charger/adapter designed for Lithium-Ion batteries when charging. The battery may explode if plugged into a different charger.
- ◆ **Do not** charge any other batteries with this charger.
- ◆ **Do not** throw the battery in the trash. Recycle according to your local regulations.
- ◆ **Do not** disassemble, short-circuit, heat above 122°F (50°C), or incinerate the battery. It may explode.
- ◆ Follow the operating and storage limit specifications listed at the end of these instructions. Otherwise, the battery may permanently lose its charge capacity.
- ◆ Unplug the charger and remove the battery from the printer if storing for a week or more.


Providing AC Power

The battery must be installed in the printer to use the AC power adapter. The AC adapter maintains the battery's current charge capacity while the printer is in use. Turn off the printer to fully charge the battery.

Charging the Battery

You can charge the battery either in or outside of the printer.

1. Connect an AC power cord into the charger.
2. Plug the power cord into a grounded electrical outlet.
3. Plug the charger into the socket on the right side of the battery.

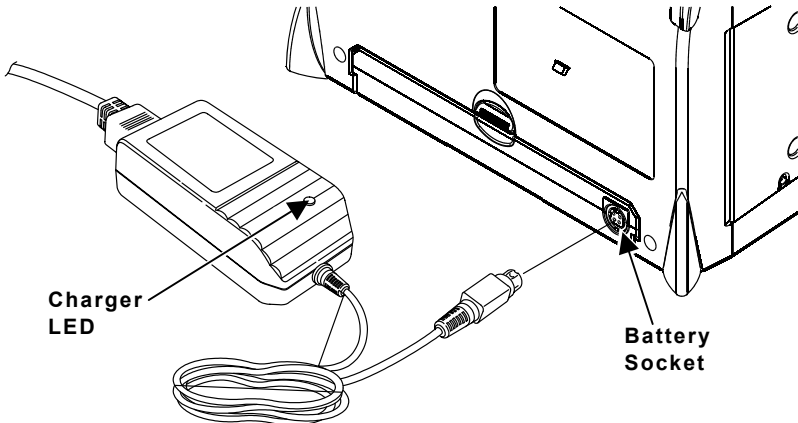

The LED lights up as the battery charges. It may take 2-3 hours for the battery to fully charge.

Reading the LED

The green charger LED indicates the following activity:

LED	Charge Status
1 Blink	Pre-charge
2 Blinks	Charging
3 Blinks	Battery usable (at 80% capacity)
Continuous blinking	Error
Solid	Charge complete

Troubleshooting

When an error occurs, the charger LED blinks continuously. In this case, repeat the charging process.

If the error still occurs, repeat the process with a new battery. If there is a still a problem call Service.

Specifications

Operating Limits:	32°F to 104°F (0°C to 40°C)
Storage Limits:	-4°F to 122°F (-20°C to 50°C)
Humidity:	5% to 90% non-condensing

Charger

Length:	4.8" (120 mm)
Width:	2.14" (53.4 mm)
Height:	1.5" (38 mm)
Input:	90 to 264 VDC 50/60 Hz
Output:	16.5 VDC/1.4A

Visit **www.monarch.com** for sales, service, supplies, information, and telephone numbers for our locations throughout the world.

Toll Free:

1-800-543-6650 (In the U.S.A.)

1-800-363-7525 (In Canada)

