



Read This First!

Loading for Peel Mode

1. Peel and discard the first four inches of labels from the backing paper.
2. Press the latch buttons and open the supply cover.

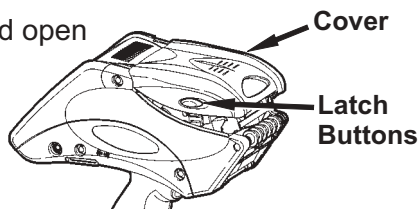


3. Open the spring-loaded supply holder and place the supply roll in the supply holder so that the supply feeds from the bottom.

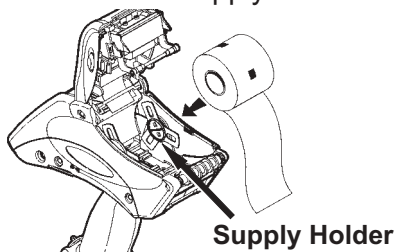

4. Hold the printer upright and gently press down on the label deflector. (It may be stiff.)



5. Feed all four inches of the backing paper **under** the applicator roller, **over** the peel bar and **under** the label deflector.

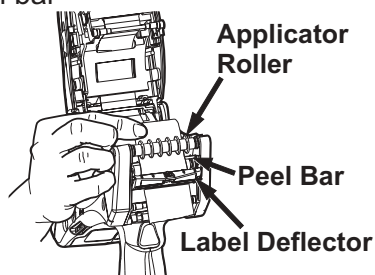


6. Push the label deflector up until it snaps into place.

7. **Partially** close the cover to the first position.

8. Pull the backing paper **over** the guide rollers, down to the pinch and feed rollers.


9. Hold the backing paper edge between the feed and pinch rollers, and press the trigger.

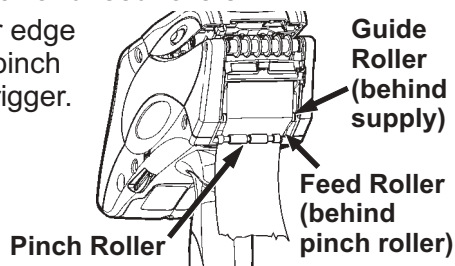


10. Turn on the printer and put into load mode.
6032: Press Load key.
6039: Select **Load Supply** from the printer icon menu, choose your supply type, and select **Calibrate**.
11. Close the supply cover completely.
6032: Press ESC key to exit.

Loading for Non-Peel Mode


1. Press the latch buttons and open the supply cover.

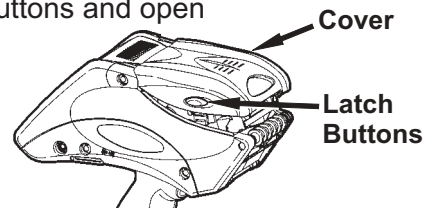


2. Open the spring-loaded supply holder and place the supply roll in the supply holder so that the supply feeds from the bottom.

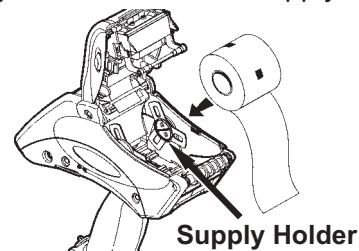

3. Feed the supplies **under** the applicator roller and **over** the label deflector.

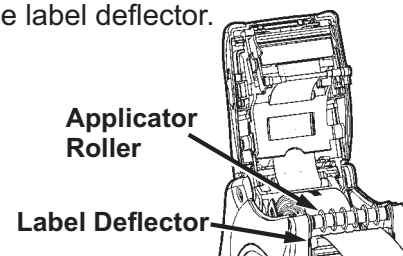

4. Turn on the printer and put into load mode.
6032: Press Load key.
6039: Select **Load Supply** from the printer icon menu, choose your supply type, and select **Calibrate**.
5. Close the supply cover completely.
6032: Press ESC key to exit.



See the *Equipment Manual* or *Operator's Handbook* for more information. An 18" X 24" Wall Chart (TC603XWC) is also available. Contact your Sales Representative for more information.

